



Fusion UV[®] LightHammer[®] Mark III System – Advanced Sensor Technology in Microwave-powered Lamp Heads

Further building upon our latest, most technologically advanced smart power supply platform, the LightHammer[®] Mark II, numerous sensors are now integrated into the Irradiator to make the Intelligent Irradiator. Fusion UV's new Intelligent Irradiator is part of the **LightHammer[®] Mark III System**; making an industry first, complete Smart UV Curing System. The LightHammer[®] Mark III is IoT-enabled for today's and the future's Digitization Roadmap.

With intelligence now added to the Irradiator, the irradiator operating parameters can be measured and monitored remotely. The data obtained from the new sensors is sent to the associated LightHammer[®] Mark III power supply via a CAN communication. The entirety of this data can be viewed using the optional Fusion UV monitoring software, Advanced Intelligent Monitoring System (AIMS[®]), now available for the LightHammer[®] Mark III Systems. This software application provides real-time system performance monitoring, enhanced system diagnostics, and preventative maintenance capability. Through the use of a proprietary communication network, many of the Smart UV Curing System's critical performance metrics can now be measured and monitored by a PC connected to the unit's network.

Key Features

- New sensors added to measure relative UV intensity, irradiator air pressure, inlet air temperature, bulb temperature, magnetron temperatures, ambient temperature, air humidity, and irradiator orientation.
- System parameters can be monitored via the optional Advanced Intelligent Monitoring System (AIMS[®]).
- Provides accurate, real-time data to improve total cost of ownership, increase equipment and production up-times, increase operational intelligence, and improve system efficiency and reliability.
- Data can be used for system performance monitoring, system diagnostics and predictive maintenance, and much, much more.
- Intelligent Irradiator has same form and fit of existing LHI10 Mark II irradiators and can be a direct replacement for an existing Mark II irradiator.

Fusion UV[®]


excelitas[®]

Specifications: LH10 Mark III System

LHI10 Mark III Intelligent Irradiator

Weight: LHI10 Mark III: 19 kg (42 lbs.).
LHI10B Mark III: 28 kg (61 lbs.).

Dimensions: LHI10 Mark III: 267 mm (10.5 in.) long x 208 mm (8.2 in.) wide at base x 384 mm (15.13 in.) high;
LHI10B Mark III: 267 mm (10.5 in.)

long x 313 mm (12.32 in.) wide at blower top x 662 mm (26.07 in.) high.

Cooling: 7.7 m³/min. @ 2,500 Pa (270 scfm @ 10.0 in. H₂O) to 8.9 m³/min. @ 3,125 Pa (315 scfm @ 12.5 in. H₂O).

Mounting Position: Any orientation.

Operating Voltage: Powered through LHI10 Mark III power supply.


Substrate Location: 53 mm (2.1 in.) from face of lamp for maximum irradiance.

Footprint: 266.7 mm x 200 mm (10.5 in. x 7.87 in.).

Bulb Fills: D, H, H+, M, Q, and V.

Magnetron Output @100% Power: 240 W/cm (600 W/in.).

Sensors: Relative UV output, bulb temperature, analog air pressure, and others.

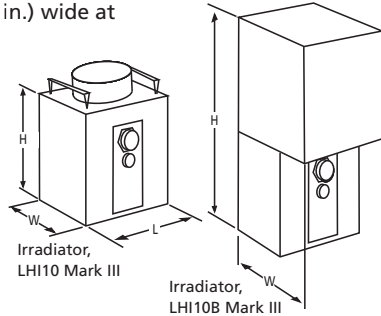

LHP10 Mark III Power Supply

Weight: 25 kg (55 lbs.); 27 kg (60 lbs.) w/ blower control module.

Dimensions (W x H x L): 419 mm (16.5 in.) x 217 mm (8.54 in.) x 777 mm (30.6 in.) with connector.

Cooling: Internal fans.

Input Voltages: 200 V–480 V (auto-ranging), 3-phase, 50/60 Hz.

Max Line Current: At 380–480 V: 11.3–15 A, at 200–240 V: 23.5–28.6 A.

Mounting Position: Horizontal – unit can be free standing, stacked, or rack mounted.

Line Power at 100%: 10 kVA.

Clearance: Allow 305 mm (12 in.) clearance front and rear of the power supply for cooling air flow and cable connections.

Safety Interlocks: E-stop, external interlocks (customer I/O), RF fault.

Mag Current @ 100% Power: 890 mA/magnetron.

Mag Current Output Accuracy: ±1%.

Power Factor @ 100% power: 99%.

I/O Communications: ⁽¹⁾Primary/Secondary (dry contact)(S), DeviceNet™ (O), Profibus® (O), EtherNet/IP™ (O), Profinet® (O).

⁽¹⁾Power Level Control: 4–20 mA, 0–10 vdc, 4-bit binary, front panel.

Front Panel Indicators/Controls: Power On/Off switch, USB port, display unit with ON/Standby/OFF buttons and Power Level control buttons.

Specifications subject to change without notice.

Intelligence Inside

- | | | |
|--|--|---|
| <ul style="list-style-type: none"> ■ UV Sensor ■ Bulb Temp Sensor ■ Mag A Temp Sensor ■ Mag B Temp Sensor ■ Inlet Air Temp Sensor | | <p style="text-align: center;">Main Board</p> <ul style="list-style-type: none"> ■ Orientation Sensor ■ Analog Pressure Sensor ■ Ambient Temp Sensor ■ Humidity Sensor |
|--|--|---|

LH Mark III Power Supply

- Improved/Lower Total Cost of Ownership
- Up to 20+% Energy Savings
- >99% Power Factor Correction
- ~90% High Efficiency
- Minimum Total Harmonic Distortion (THD)
- DC Output w/Essentially No Ripple
- Universal Industrial Input Power, Auto Ranging
- 4 Optional World Leading Industrial Open Communication Protocols
- IoT-Enabled
- Up to 75% Lighter than Ferro-Resonant PS
- Meets and Exceeds World-Wide Standards & Directives
- Backwards Compatible

Lamps contain mercury. Manage in accordance with local, state or federal disposal laws.

⁽¹⁾ LH10 Mark III Power Supply Power Level Control Options

Method	Control
4–20 mA input	1% steps, via primary/secondary operation
0–10 Vdc input	1% steps, via primary/secondary operation
4-bit binary input	5% steps, via primary/secondary operation
front panel switches	1% steps, via primary/secondary operation

Contact your local Excelitas Fusion UV office for an engineered solution for your specific requirements.



www.excelitas.com

info.hna@excelitas.com

ISO 9001 Certified QMS

